



Stella Doradus Ireland Ltd.

2.4GHz Parabolic antenna Part No.: 24 SD15



The 24 SD15 is a high gain point to point antenna designed for use in high density RF environments. The excellent radiation characteristics are the distinguishing features of these well priced antennas. This family of grid antennas is designed for high wind harsh environments.

Electrical Specification

Gain	15dBi
Bandwidth	2.4-2.485 Ghz
3dB beam Pattern	30° x 20°
VSWR	1.8: 1
Front to Back Ratio	29dB
Cross Polar Ratio	24dB
Polarization	Vertical / Horizontal
Power Rating	50W
Impedance	50 ohms
Termination	N-Male or N-female pigtail
Surge Protection	Built in


Mechanical Specifications

Length	45 cm
Width	25 cm
Weight (incl brackets)	1.2kg
Windage(at 216kmph)	114 N
Mechanical Tilt	0-25 degrees
Mounting Pipe	5 cm pipe

Materials

Radiating Element	Copper Dipole
Radome (feed)	UV stabilized Polystyrene
Clamps	HDG steel + galvanised steel bolts

24 SD15 Azimuth Pattern

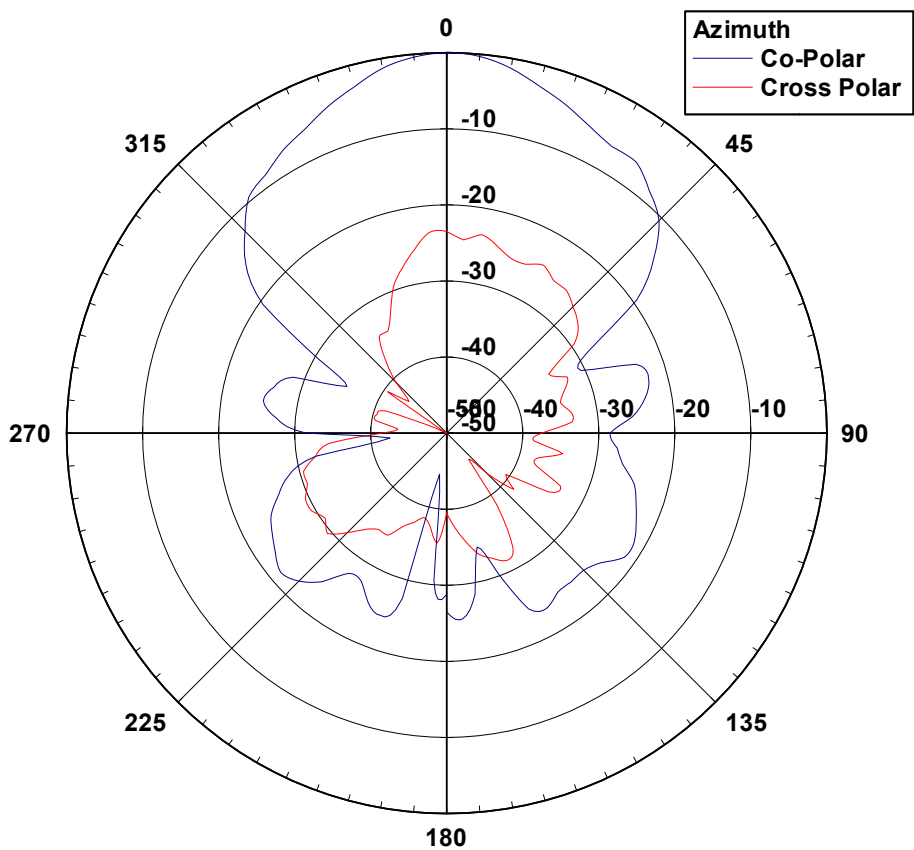

24 SD15 Elevation Pattern

