



# Stella Doradus Ireland Ltd.

## Cross polarized Wimax 4 Port Base Station Antenna

Part No. 35 6008-4 XPXP-MIMO

3.4 - 3.6GHz



*The 35 6008-4 XPXP-MIMO is a high gain base station antenna designed for use in high density RF environments. The excellent radiation characteristics are the distinguishing features of these antennas.*

### Electrical Specification

Gain		18dBi
3dB beam Pattern	Azimuth	60°
	Elevation	7.5°
Bandwidth		3.4-3.6GHz
Reflection		-13.5dB
Front to Back Ratio		25dB
Polarization		2 x Dual Pol +/- 45 deg
Power Rating		50W average
Impedance		50 ohms
Termination		4 x Fixed N- female
Cross Pol. Discrimination		≤ -20dB
DownTilt		4 degrees


### Mechanical Specifications

Length	91cm
Width	23.5cm
Depth	8.8 cm
Weight	3.5kg
Windage(at 200kmph)	61.5kg
Mechanical Tilt	0-7 degrees
Mounting Pipe	10cm pipe

### Materials

Radiating Element	Beam forming PCB patch array
Radome	Steel + White UV stabilised polystyrene
Clamps	HDG steel + stainless steel bolts

35 6008-4 XPXP-MIMO Azimuth Pattern 1 of 4 Antennas

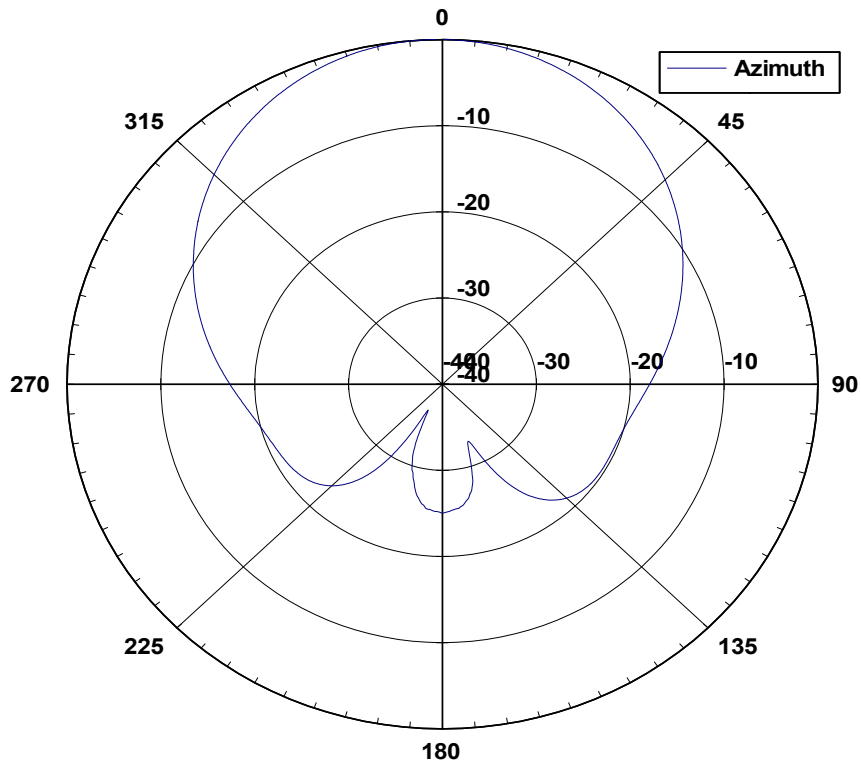

35 6008-4 XPXP-MIMO Elevation Pattern

